


# FTP Cat6 Patch cord, yellow, 0.25 m

PP6-0.25M/Y

- Perfect connection
- Foil shielded for a reliable connection
- Gold plated contacts

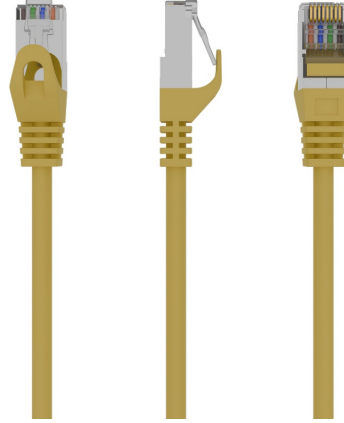

## Features

- Foil shielded patch cord, 8P8C
- 50u" gold plated contacts
- Molded strain reliefs
- Snagless boots

## Packaging

Q'ty in crtn, pcs	500
Crtn volume, CUM	0.036
Crtn weight, kgs	10.3
Individual package size LxWxH:	245x170x245 mm
Carton size LxWxH:	405x295x300 mm
Country of origin	CN
Barcode	8716309101622
Customs code	8544421000

## Specifications

Category: category 6  
Type: FTP (foil shielded)  
Frequency bandwidth: Max. 250 MHz  
Compliance with ANSI / TIA / EIA-568B standards  
Conductor: AWG 26 (7 x 0.15 mm wire), CCA  
Conductor insulation: HDPE 0.86 mm  
Shielding: AL foil  
LDPE filler: yes  
Polyester tape: yes  
Drain wire: yes (7 x 0.12 mm CCA)  
Jacket material: PVC  
Jacket braiding: n/a  
Jacket outer diameter: 6.2 mm  
Length: conform item description  
Color: conform item description

## Certificates

