




Flashforge Guider 2S 3D Printer

FF-3DP-1NG2S-01

FRIENDLY & EASY TO USE

- Equipped with many versatile features, the Guider2S enables you to create practical & interesting objects for all your home, professional or educational needs.
- Fully closed design
- Big model size
- Versatile, closable printing chamber
- Includes easy to use FlashPrint Slicing Software

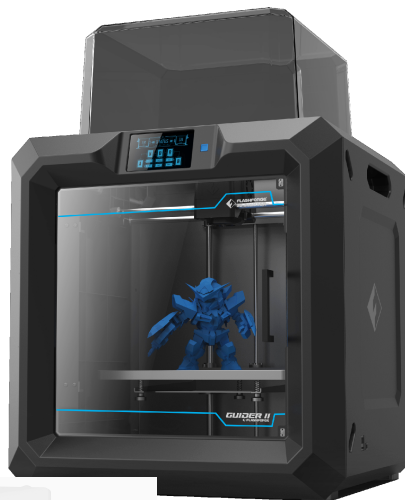

Eigenschaften

- 3D printer with single nozzle for use with ABS/PLA/PVA filament
- Very large build size
- 3.5-inch touch screen panel
- Print preview function (gx format)
- 16-language package for multilingual operation
- Strong 6.5 mm non-deforming alloy printing platform (heated)
- Fully-closed design with automatic temperature control
- Connectivity: LAN, USB flash-drive, USB cable
- Powered by Flashprint easy to use slice software

Verpackungsdetails

Stückzahl pro Karton	1
Karton Volumen, m³	0.29547
Kartongewicht, kg	38.68
Abmessungen Verpackung (LxBxH):	670x630x700 mm
Abmessungen Umkarton (LxBxH):	670x630x700 mm
Ursprungsland	CN
EAN Code	8716309101264
Zolltarif-Nr.:	8477809990

Lieferumfang

3D printer
PLA Filament
2x spool holder
2x print Tape
Power Cable
USB Cable

Spezifikationen

Principle: FFF
Build size: up to 280 x 250 x 300 mm
Filament: ABS/PLA/PVA spool, 1.75mm
Print precision: ±0.10mm
Positioning precision: Z axis 0.0025 mm, XY axis 0.011 mm
Layer thickness: 0.05 0.4 mm
Nozzle diameter: 0.40 mm
Extruder temperature: 240 °C
Power consumption: 100 240V AC, up to 450 W
Slicing software: Flashprint
Heating plate temperature: ABS: 110 115 ° / PLA: 50 °

Systemvoraussetzungen

Windows XP/Vista/7/8/10
Connection: USB cable, flash drive or RJ45 LAN network

CE-Erklärung

