




Flashforge Guider 2S 3D Printer

FF-3DP-1NG2S-01

FRIENDLY & EASY TO USE

- Equipped with many versatile features, the Guider2S enables you to create practical & interesting objects for all your home, professional or educational needs.
- Fully closed design
- Big model size
- Versatile, closable printing chamber
- Includes easy to use FlashPrint Slicing Software

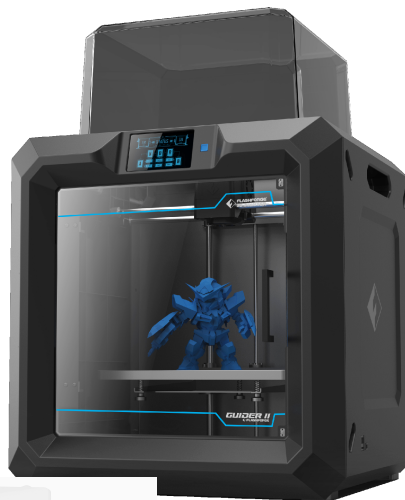

Χαρακτηριστικά

- 3D printer with single nozzle for use with ABS/PLA/PVA filament
- Very large build size
- 3.5-inch touch screen panel
- Print preview function (gx format)
- 16-language package for multilingual operation
- Strong 6.5 mm non-deforming alloy printing platform (heated)
- Fully-closed design with automatic temperature control
- Connectivity: LAN, USB flash-drive, USB cable
- Powered by Flashprint easy to use slice software

Συσκευασία

| | |
|-------------------------------------|----------------|
| Ποσότητα ανά χαρτοκιβώτιο, τμχ | 1 |
| Όγκος χαρτοκιβωτίου. CUM | 0.29547 |
| Βάρος χαρτοκιβωτίου, Kg | 38.68 |
| Μέγεθος ατομικής συσκευασίας LxWxH: | 670x630x700 mm |
| Διαστάσεις χαρτοκιβωτίου LxWxH: | 670x630x700 mm |
| Χώρα προέλευσης | CN |
| Barcode | 8716309101264 |
| Τελωνειακός κώδικας | 8477809990 |

Περιεχόμενα συσκευασίας

3D printer
PLA Filament
2x spool holder
2x print Tape
Power Cable
USB Cable

Προδιαγραφές

Principle: FFF
Build size: up to 280 x 250 x 300 mm
Filament: ABS/PLA/PVA spool, 1.75mm
Print precision: ± 0.10 mm
Positioning precision: Z axis 0.0025 mm, XY axis 0.011 mm
Layer thickness: 0.05 0.4 mm
Nozzle diameter: 0.40 mm
Extruder temperature: 240 °C
Power consumption: 100 240V AC, up to 450 W
Slicing software: Flashprint
Heating plate temperature: ABS: 110 115 ° / PLA: 50 °

Απαιτήσεις συστήματος

Windows XP/Vista/7/8/10
Connection: USB cable, flash drive or RJ45 LAN network

Πιστοποιητικά

