


3DP-ABS3-01-BWD

## ABS Filament Burlywood, 3 mm, 1 kg

### VERSATILE & EASY TO USE

- Acrylonitrile butadiene styrene (ABS) is a common thermoplastic strong, flexible durable plastic available in a range of colors.
- ABS is the plastic used in lots of things around us and is perfect for heated plastic extrusion 3D printing.

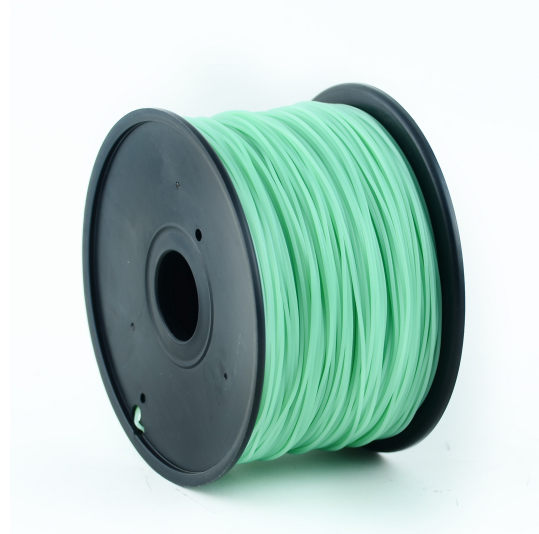

### Características

- High strength, good toughness
- Low density: when printing larger volume the model is lighter
- Can be applied to a variety of 3D printers

### Embalaje

Cantidad por caja, pcs	12
Volumen caja, M3	0.048
Peso caja, kgs	14.52
Medidas cajas individuales LxWxH:	180x180x110 mm
Medidas caja LxWxH	350x370x370 mm
País de origen	CN
Código de barras	8716309088916
codigo de aduanas	3916909000

### Especificaciones

Material: ABS, 3 mm diameter  
Weight: 1 kg/spool (2.2 lbs)  
Length: approx. 140 m  
Density at 21.5°C: 1.01 g/cm<sup>3</sup>  
Melt Flow Index at 10min, 2.16kg: 5  
Melt Point: 225 240 °C  
Heat-Deflection-Temperature at 0.455 MPa: 85 °C  
Yield Strength at 5mm/min: 45 MPa  
Impact Strength: 16 KJ/m<sup>2</sup>  
Elongation at Break: 30 %  
Diameter: 3.00 ± 0.05 mm

### Requisitos del sistema

A 3D printer with 3 mm extruder of temperature around 230 °C, suitable for use with ABS filament

### Certificados

