





### **ABS Filament Grey to White, 1.75 mm, 1 kg**

3DP-ABS1.75-01-GW

#### **VERSATILE & EASY TO USE**

- Acrylonitrile butadiene styrene (ABS) is a common thermoplastic strong, flexible durable plastic available in a range of colors.
- ABS is the plastic used in lots of things around us and is perfect for heated plastic extrusion 3D printing.

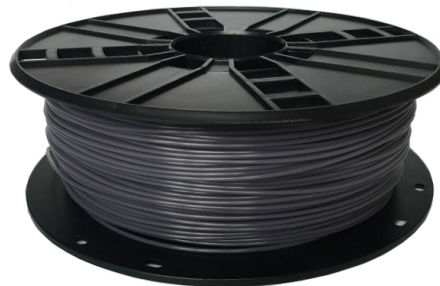

#### **Características**

- High strength, good toughness
- Low density: when printing larger volume the model is lighter
- Can be applied to a variety of 3D printers

#### **Embalaje**

Qtd por caja, pcs	8
Volumen caja, M3	0.036
Peso caja, kgs	11.86
Medidas cajas individuales LxWxH:	210x210x80 mm
Medidas caja LxWxH	440x440x185 mm
Pais de origen	CN
Código de barras	8716309094665
codigo de aduanas	3916909000

#### **Especificaciones**

Material: ABS, 1.75 mm diameter  
 Weight: 1 kg/spool (2.2 lbs)  
 Length: approx. 400 m  
 Density at 21.5 °C: 1.01 g/cm<sup>3</sup>  
 Melt Flow Index at 10min, 2.16 kg: 5  
 Melt Point: 225 240 °C  
 Heat-Deflection-Temperature at 0.455 MPa: 85 °C  
 Yield Strength at 5mm/min: 45 MPa  
 Impact Strength: 16 KJ/m<sup>2</sup>  
 Ensile Break: 30 %  
 Diameter: 1.75 ± 0.05 mm

#### **Requisitos del sistema**

A 3D printer with 1.75 mm extruder of temperature around 230 °C, suitable for use with ABS filament

#### **Certificados**

