


FF-3DP-1NG2-01

# Flashforge Guider 2 3D Printer

## FRIENDLY & EASY TO USE

- Equipped with many versatile features, the Guider2 enables you to create practical & interesting objects for all your home, professional or educational needs.
- Fully closed design
- Big model size
- Versatile, closable printing chamber
- Includes easy to use FlashPrint Slicing Software

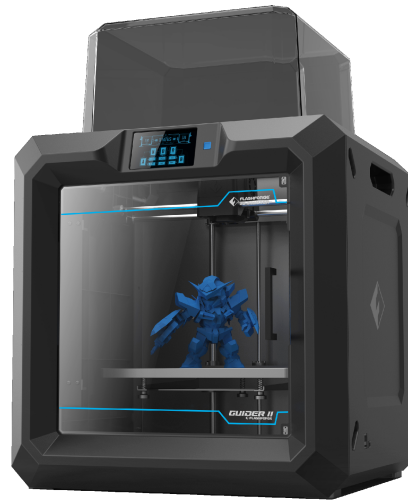

## Features

- 3D printer with single nozzle for use with ABS/PLA/PVA filament
- Very large build size
- 3.5-inch touch screen panel
- Print preview function (gx format)
- 16-language package for multilingual operation
- Strong 6.5 mm non-deforming alloy printing platform (heated)
- Fully-closed design with automatic temperature control
- Connectivity: LAN, USB flash-drive, USB cable
- Powered by Flashprint easy to use slice software

## Packaging

Q'ty in crtn, pcs	1
Crtn volume, CUM	0.29547
Crtn weight, kgs	38.18
Individual package size LxWxH:	670x630x700 mm
Carton size LxWxH:	670x630x700 mm
Country of origin	CN
Barcode	8716309095112
Customs code	8477809990

## Package contents

3D printer  
 PLA Filament  
 2x spool holder  
 2x print Tape  
 Power Cable  
 USB Cable

## Certificates



## Specifications

Principle: FFF  
 Build size: up to 280 x 250 x 300 mm  
 Filament: ABS/PLA/PVA spool, 1.75mm  
 Print precision:  $\pm 0.10$ mm  
 Positioning precision: Z axis 0.0025 mm, XY axis 0.011 mm  
 Layer thickness: 0.05 0.4 mm  
 Nozzle diameter: 0.40 mm  
 Extruder temperature: 240 °C  
 Power consumption: 100 240V AC, up to 450 W  
 Slicing software: Flashprint  
 Heating plate temperature: ABS: 110 115 ° / PLA: 50 °  
 File type Input: 3MF/ STL / OBJ/FPP/BMP/PNG/JPG/JPEG, Output: gx/g

## System requirements

Windows XP/Vista/7/8/10  
 Connection: USB cable, flash drive or RJ45 LAN network