



1200 VA UPS WITH AVR



- Provides backup power - prevents data loss
- Protects your sensitive and valuable equipment
- Compact and reliable - ideal for home and small office use

www.energenie.com



1200 VA UPS WITH AVR



1200 VA UPS WITH AVR

- Specifications:**
- UPS type: line interactive
 - Input: AC 220V ± 25 %, 50 Hz / 60 Hz ± 10 %
 - Output: AC 220V ± 10 %, 50 Hz / 60 Hz ± 0.5 % (on battery)
 - Switching time: no more than 10 ms
 - Backup time: 8...20 mins (depends on the load)
 - Battery: sealed lead-acid 12 V / 7.7 Ah x 2pcs
 - Charge time: up to 12 hours
 - Sockets: 1 x input (C14), 4 x output (C13); 2 x telephone RJ11 connectors;
 - 1 x USB-B connector
 - Operating conditions: 0 °C - 40 °C, at humidity 10 % - 90 % RH non condensing
 - Power: 1200 VA (720 W)
 - Dimensions: 382 mm x 222 mm x 124 mm
 - Product weight: 10.4 kg

System requirements:


- Software is compatible with Windows® Vista, Windows® 7/8 and Windows® 2008 server

Package contents:

- UPS
- Power cord
- USB cable
- Software CD
- Spare fuse



UPS-PC-1202AP

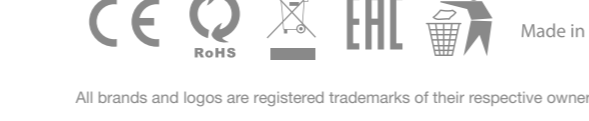

1200 VA UPS WITH AVR



- Provides backup power - prevents data loss
- Protects your sensitive and valuable equipment
- Compact and reliable - ideal for home and small office use

www.energenie.com



1200 VA UPS WITH AVR



1200 VA UPS WITH AVR

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1200 VA UPS with AVR | 1200 VA UPS mit AVR |
| <ul style="list-style-type: none"> → Unterbreichbare 1200 VA power supply for PC's → Automatic output voltage regulation (AVR) → USB interface → LED status indication → Short circuit protection → Surge, spike and lightning protection → Audible and visual alarms → Overcharge and overdischarge protection → Fax/Modem/Telephone protection socket → Including Practical UPS Management software | <ul style="list-style-type: none"> → Automatische Ausgangsspannungsgleichung (AVR) → USB Schnittstelle → LED-Statusanzeige → Kurzschlussicherung → Überspannungs- und Spannungsspitzenabsicherung sowie Blitzschutz → Hörbare und sichtbare Alarme → Abschaltung bei Überladung und Tiefentladung → Fax/Modem/Telefon-Anschlussschutz → Inkl. praktische UPS-Management-Software |

- | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1200 VA UPS met AVR | Источник бесперебойного питания 1200 Вольт-ампер с регулятором напряжения (АВР) |
| <ul style="list-style-type: none"> → 1200 VA noodstroomvoorziening (UPS) voor o.a. PC's → Automatische AC spanningregelaar (AVR) → Ingebouwde overspanningsbeveiliging biedt bescherming tegen kortsluiting en spanningspieken veroorzaakt door bijvoorbeeld blikseminslag → Beveiligd-fax/modem/telefoonansluiting → Hoörbaar en zichtbaar alarm bij stroomuitval → LED status indicator → Isolere batterij met bescherming tegen overladen of teveel ontladen → Inclusief praktische UPS Management software | <ul style="list-style-type: none"> → Автоматический регулятор выходного напряжения (АВР) → USB-интерфейс для управления и индикации → Сетевое предохранительное устройство → Защита от коротких замыканий → Защита от выбросов напряжения, грозы и молний → Звуковое и визуальное оповещение о сработках → Защита батареи от переразряда и глубокой разрядки → Защищенный от помех телефонный/модемный разъем |

- | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Джерело безперебійного живлення 1200 Вольт-ампер з регулятором напруги (АВР) | 1200 VA UPS s AVR |
| <ul style="list-style-type: none"> → Джерело безперебійного живлення 1200 Вольт-ампер → Автоматичний регулятор вихідної напруги (АВР) → USB-інтерфейс для управління і індикації → Самодіяльна індикація стану → Захист від короткого замикання → Захист від викидів напруги, перепадів і блискавок → Звукове і візуальне оповіщення про події → Захист батареї від переразряду і глибокого розряду → Защищений від перепадів телефонний / модемний роз'єм → В комплект входить програма забезпечення для управління ДЖБ | <ul style="list-style-type: none"> → Automatická regulace napětí a vyústového (AVR) → Interface: USB → Kontrolka LED → Zabezpečenie proti zkratovému → Zabezpečenie proti napätovým → Odstrana nadmerného → alarm (zvukový i svetový) → Ochrana pred prebitím batérie oraz proti salokovému → uzamčením akumulátora → Ochrana ochrany linki telefonovej/ modemovej → (kódová) |

size: 390x180x295 mm



Pantone blue 072C

Pantone 376C

60% black