


FF-3DP-1NG2-01

## Flashforge Guider 2 3D Printer

### FRIENDLY & EASY TO USE

- Equipped with many versatile features, the Guider2 enables you to create practical & interesting objects for all your home, professional or educational needs.
- Fully closed design
- Big model size
- Versatile, closable printing chamber
- Includes easy to use FlashPrint Slicing Software

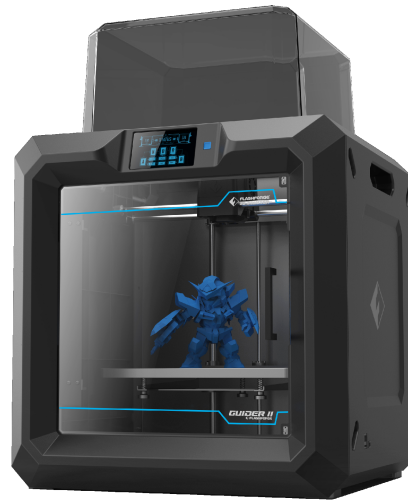

### Propriétés

- 3D printer with single nozzle for use with ABS/PLA/PVA filament
- Very large build size
- 3.5-inch touch screen panel
- Print preview function (gx format)
- 16-language package for multilingual operation
- Strong 6.5 mm non-deforming alloy printing platform (heated)
- Fully-closed design with automatic temperature control
- Connectivity: LAN, USB flash-drive, USB cable
- Powered by Flashprint easy to use slice software

### Packaging

Q'ty in crtn, pcs	1
Crtn volume, CUM	0.29547
Crtn weight, kgs	38.18
Individual package size LxWxH:	670x630x700 mm
Carton size LxWxH:	670x630x700 mm
Country of origin	CN
Barcode	8716309095112
Customs code	8477809990

### Contenu du colis

3D printer  
PLA Filament  
2x spool holder  
2x print Tape  
Power Cable  
USB Cable

### Certificats



### Spécificités

Principle: FFF

Build size: up to 280 x 250 x 300 mm

Filament: ABS/PLA/PVA spool, 1.75mm

Print precision:  $\pm 0.10$ mm

Positioning precision: Z axis 0.0025 mm, XY axis 0.011 mm

Layer thickness: 0.05 0.4 mm

Nozzle diameter: 0.40 mm

Extruder temperature: 240 °C

Power consumption: 100 240V AC, up to 450 W

Slicing software: Flashprint

Heating plate temperature: ABS: 110 115 ° / PLA: 50 °

File type Input: 3MF/ STL / OBJ/FPP/BMP/PNG/JPG/JPEG, Output: gx/g

### Configuration require

Windows XP/Vista/7/8/10

Connection: USB cable, flash drive or RJ45 LAN network